

FIG.1

101; lens unit 102; photographing unit 103; image processing unit
104; PC interface unit 105; host computer 106; view finder 107; memory
108; control unit 109; shutter 110; first switch 111; second switch
5 112; backup battery unit 충전전압; charge voltage 동작전압; operation voltage

FIG.2

렌즈; lens 106; view finder 121; lens cap 122; lens cap opening/closing switch

FIG.3

131; holder 132; groove

FIG.5

151; memory card 152; gate array

FIG.6

161; focus adjustment unit 162; focus adjustment reading unit
163; display unit

FIG.7

171; switch 172; switch 173; screw 174; detector

FIG.8

181; high-band filter 182; adder 183; comparator

FIG.10

163; display unit 190; brightness adjustment unit
200; brightness adjustment reading unit

FIG.11 201; register 202; register 203; comparator

FIG.12 211; MP3 decoder 213; MP3 mode switch

FIG.13 220; jack 221; switch

FIG. 1

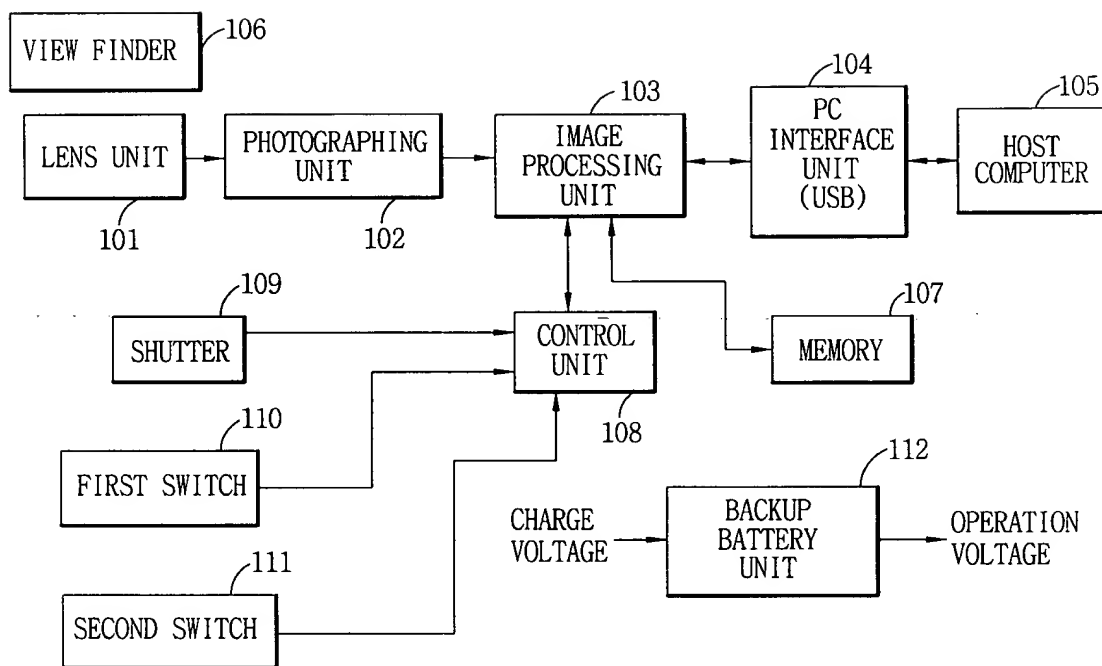


FIG. 2A

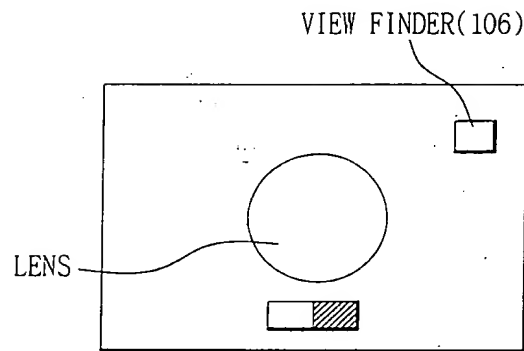


FIG. 2B

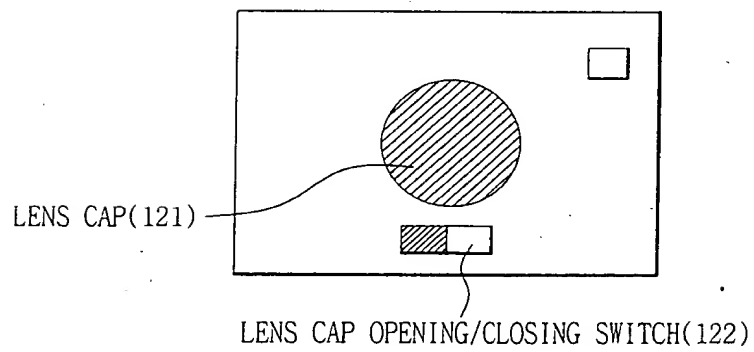


FIG. 3A

FIG. 3A

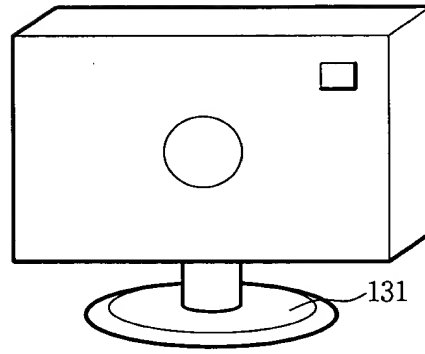


FIG. 3B

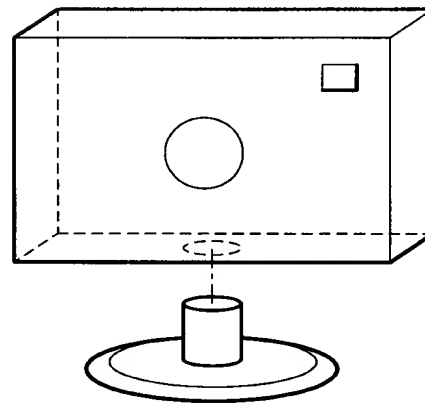


FIG. 3C

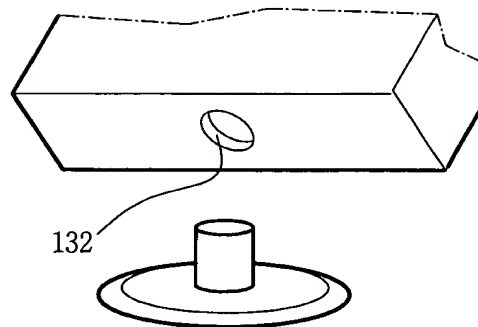


FIG. 4

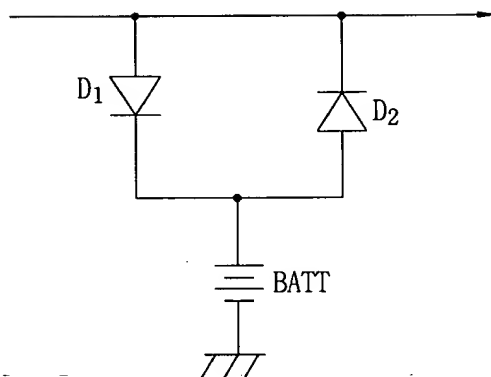


FIG. 5

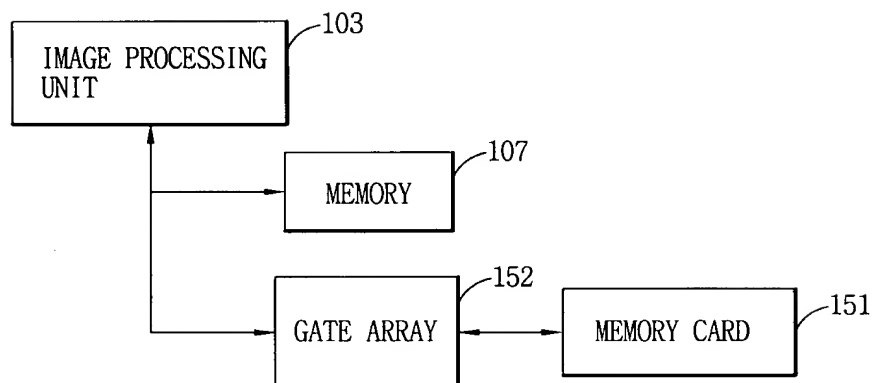


FIG. 6

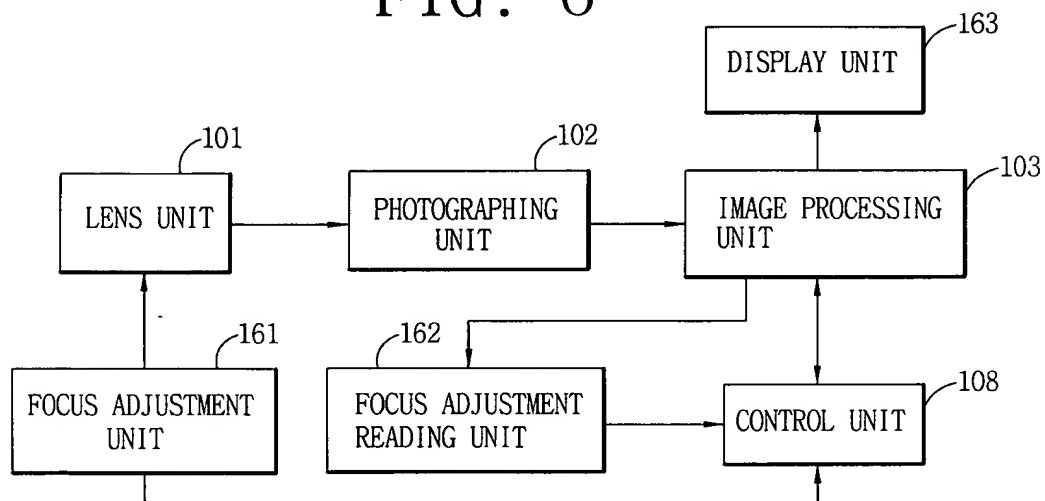


FIG. 7

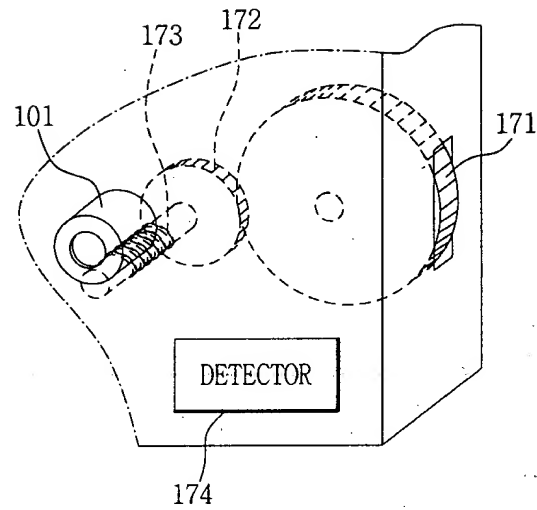


FIG. 8

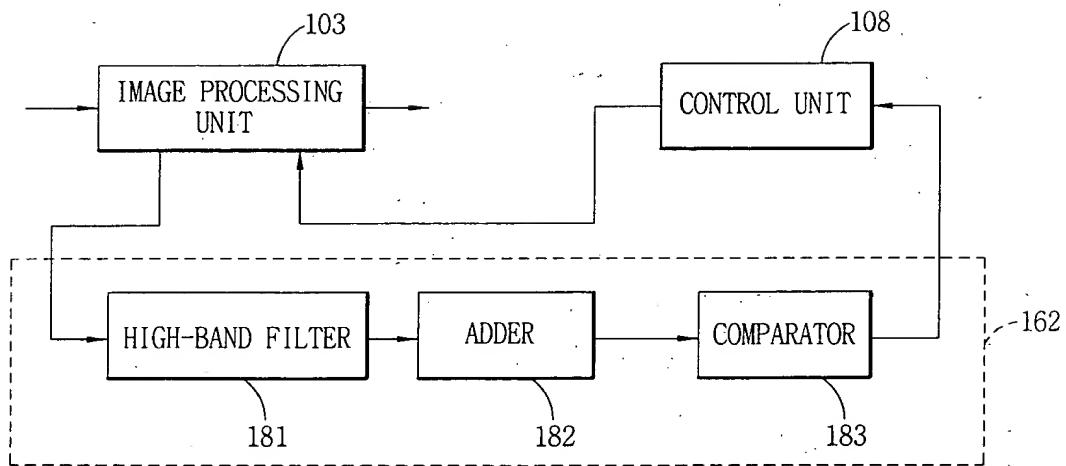


FIG. 9

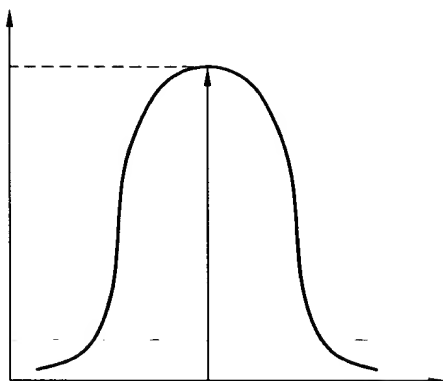


FIG. 10

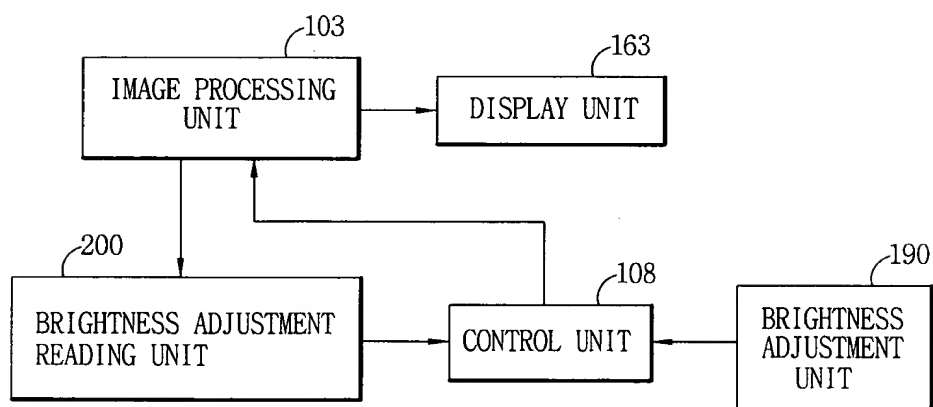


FIG. 11

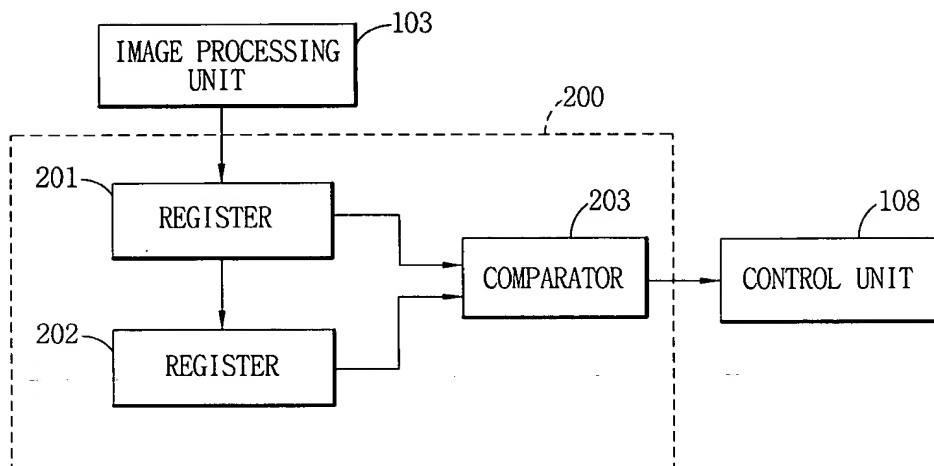


FIG. 12

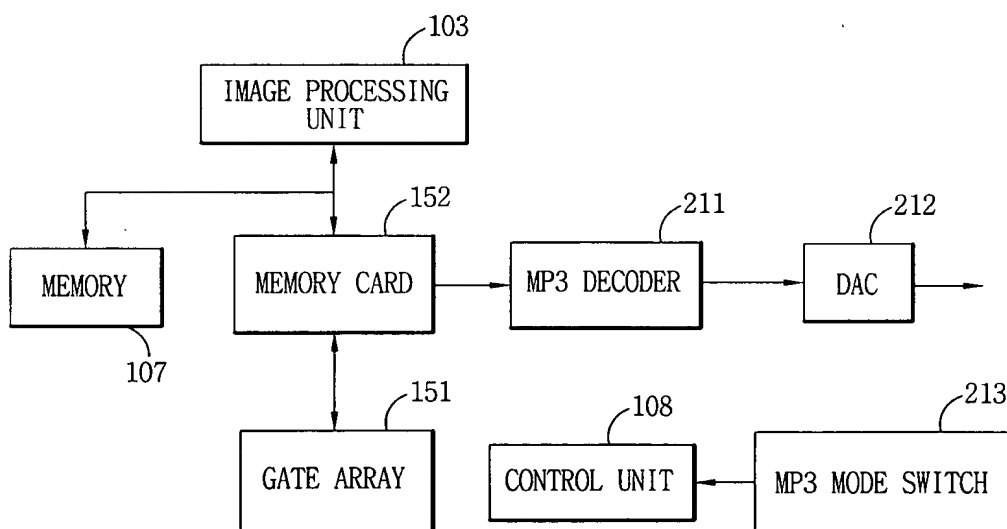


FIG. 13A

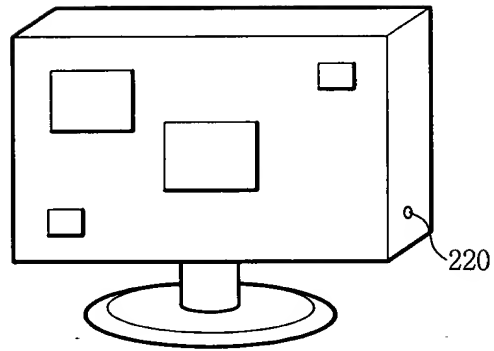


FIG. 13B

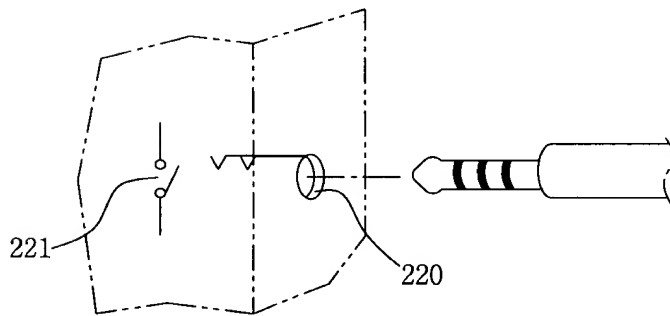


FIG. 13C

